


ANGLE PROTRACTORS

Angle Protractor with Digital Display

- Measuring ranges 1x 360°, 2x 180°, 4x 90°
- Large decimal or sexagesimal display
- 2 measuring directions
- Fine setting with adjustment screw
- Locking system
- Scale L = 200 mm (300 or 500 mm available as options)
- RS232 data output

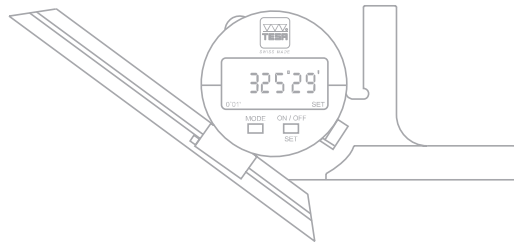

00630010 Angle protractor with digital display. Supplied with a scale of L = 200 mm

OPTIONAL ACCESSORIES:

- 00660004** Scale 200 mm
- 00660005** Scale 300 mm
- 00660006** Scale 500 mm
- 00660007** Supporting base with 1 flat measuring face and 1 prismatic measuring face
- 00660008** Square for measuring sharp angles
- 01961000** Lithium battery, 3V, CR 2032
- 04761062** Opto-USB cable, duplex, bidirectional communication



Measuring ranges:
1 x 360°, 2 x 180°,
4 x 90°



LCD, 5 digits + sign



0,01° / 1 minute
of arc



8,5 mm



Max. permi. error.: 4
minutes of arc



Stainless steel body,
hardened



Maximum rotation
speed.: 1080°/s



Preset to 0° or 180°



RS232 opto-coupled



1x CR2032 3,0 V



5000 hours



+5°C to +40°C



IP51 (CEI 529)



410 g



Wooden case (ISPM
15 and NIPM 15)



Identification
number



Declaration of
conformity

