



**SAVE YOUR GOODS, and
SAVE YOUR MONEY!**

IMPACT INDICATOR²

Impact Indicator 2 assists to improve supply chain procedures so that mishandling can be limited. It reveals when products have been subjected to a possibly harmful shock (in storage or during transit) that may have caused damage to your valuable goods.

Impact Indicator 2 functions bi-directional and is tamper-proof. Upon impact it mechanically activates and irreversibly shows a white to red color change.



Their presence on shipments discourages improper handling, which lowers expenses associated with damage; decreases risk of damaged products; increases buyers confidence; and reveals possible concealed damage.

Kilo	M ³	0.14-0.42	0.42-1.42	1.42-2.83	2.83-7.08	7.08-14.16	14.16-304.8	304.8+
0-5		75G	75G	50G	37G	N/A	N/A	N/A
5-11		75G	50G	50G	37G	25G	N/A	N/A
11-23		50G	50G	37G	25G	25G	15G	N/A
23-45		50G	37G	37G	25G	15G	15G	10G
45-113		37G	37G	25G	25G	15G	15G	10G
113-454		37G	25G	25G	15G	15G	10G	10G
454-907		25G	25G	25G	15G	15G	10G	5G
907-2.268		25G	25G	15G	15G	10G	10G	5G
2.268-4.536		25G	15G	15G	15G	10G	10G	5G
4.536-6.804		N/A	15G	15G	10G	10G	5G	5G
6.804-9.072		N/A	N/A	10G	10G	5G	5G	5G
9.702-13.608		N/A	N/A	N/A	5G	5G	5G	5G
13.608+		N/A	N/A	N/A	N/A	5G	5G	5G

- 1) Select the column with the weight of your package.
- 2) Then see the see with the volume of your package.

This will show you a first recommendation of which sensitivity to use. Your specific package may require a slightly different sensitivity. Doubts? - Talk to us!

Included with each indicator:

ï÷ WARNING LABEL


Remove the Alert Sticker in the center and attach that to the Bill Of Lading.

Place the Warning Label around the Impact Indicator.









î÷ INSTRUCTIONS

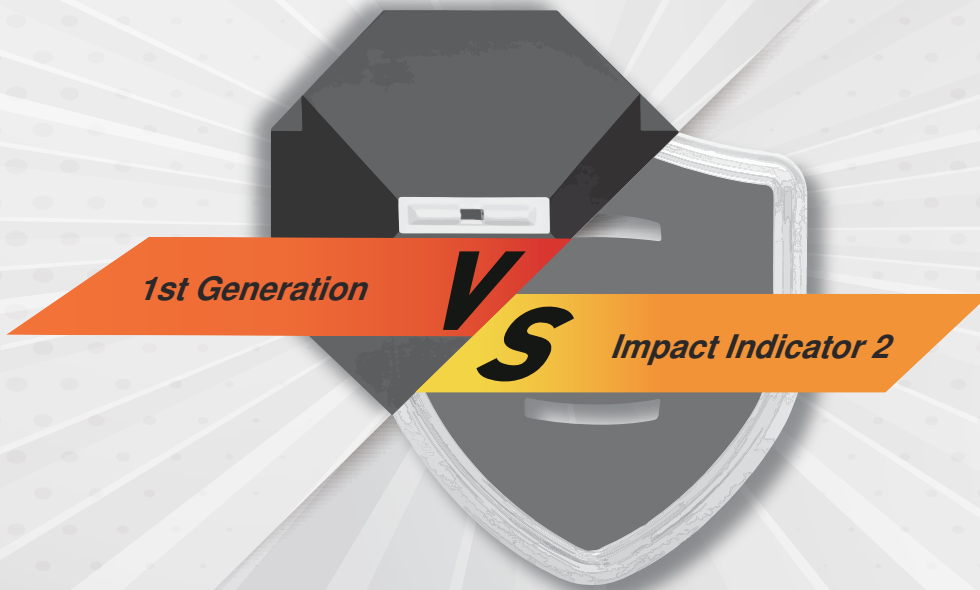
Place this sticker close to the indicator on your parcel.



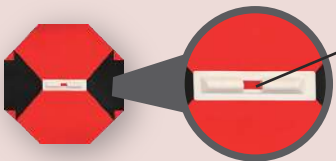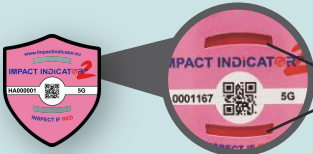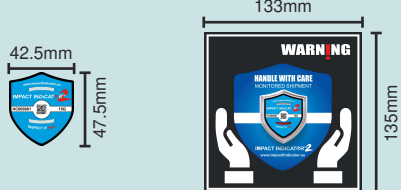


Compare Impact Indicators differences to see which one provides the best monitoring for your application.

25G~100G	Sensitivity	5G~75G
Tamperproof	Security	Tamperproof
Optional	Serialization	Yes
 When available 1234567890123456789	Scan type	
 0.099 cm ²	Indication Window Size	 0.533 cm ²
 97mm x 97mm	Dimension	 42.5mm x 47.5mm and 133mm x 135mm
Always Live (Possible activation at any time, so careful handling required.) 	Armability	Field-armable (Eliminates any activation until the backliner has been removed) 

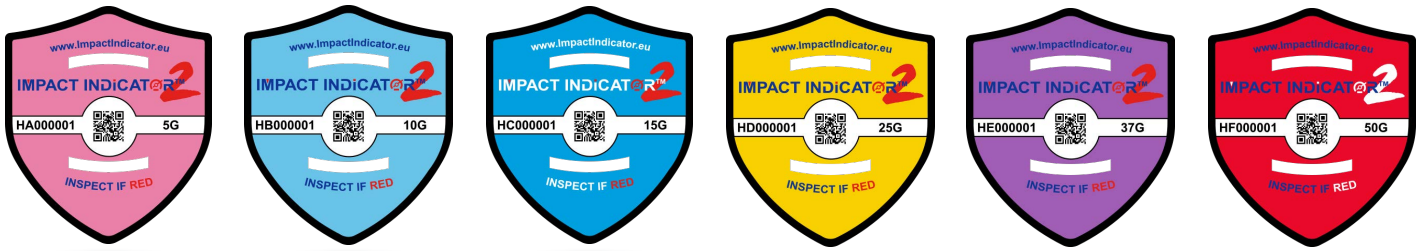


Key Specifications

Sensitivity Range	5G, 10G, 15G, 25G, 37G, 50G, 75G	
Impact Duration	0.5 - 50ms	
Tolerance	±15% at 20°C, 1 ATM	
Operating Temperature	-25°C to 80°C	
Weight	7.2g - 9.1g (varies by sensitivity)	
Dimensions	42.5 mm x 47.5 mm x 5.5mm	
Security	Tamperproof, Serialized	
Adhesive	Self-adhesive back on release liner	
Product Life	2 years when stored at 20°C, 1 ATM	
Storage Conditions	20°C, 1 ATM 0% - 99% RH Non-condensing	



These indicators are manufactured:

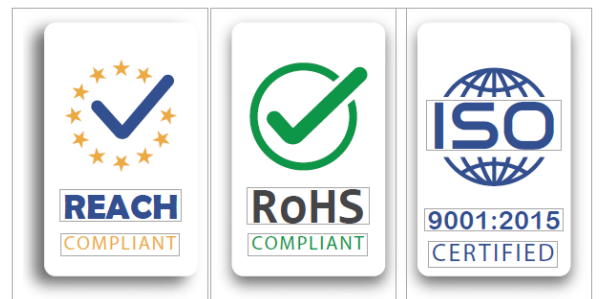

LOGIMON
LOGISTICS MONITORING SOLUTIONS

Hameinde 1
7371CS Loenen Gld
The Netherlands

Tel.: +31 (0)85 0066 082
Email: info@logimon.solutions
Web: www.ImpactIndicator.eu